Temco Platform

The front page — the Azure portal's palette and scale · built Nov 10, 2026

The front page — the Azure portal's palette and scale

Status: implemented, corrected after review. The page is the **platform description** — titled `Temco Platform`, with no breadcrumb — in the **Azure portal's own palette and type scale** (24px page title, 18px section, 14px card, 13px text; `#0078d4` blue, `#1f2327` ink, `#faf9f8` page, `#edebe9` hairline), not the marketing scale of §2. The rules are in `extensions/temco-ui/media/page.css`; the markup in `extensions/temco-ui/src/components.ts`.


0. What went wrong twice, so it does not go wrong a third time

attempt	what it was	why it was wrong
v1	a navy→blue gradient band with a cyan glow and a grid	that is a marketing *poster*. Nothing on the Azure pricing page looks like it, and it made the first screen shout
v2	the OpenAI documentation page from the screenshot	calm and readable, but it turned the front page into a *reading* page and dropped the one thing the Azure page is built on: **three options side by side, each with ticks and a button**

v3 is the Azure account / purchase-options page read as five bands, built out of Microsoft's own Fluent 2 numbers (taken from the Fluent 2 design-system stylesheet, not invented): a tinted wash behind the title, three option cards, a numbers strip, one tinted callout, and questions at the bottom.

1. The reference, as five bands

TEXT

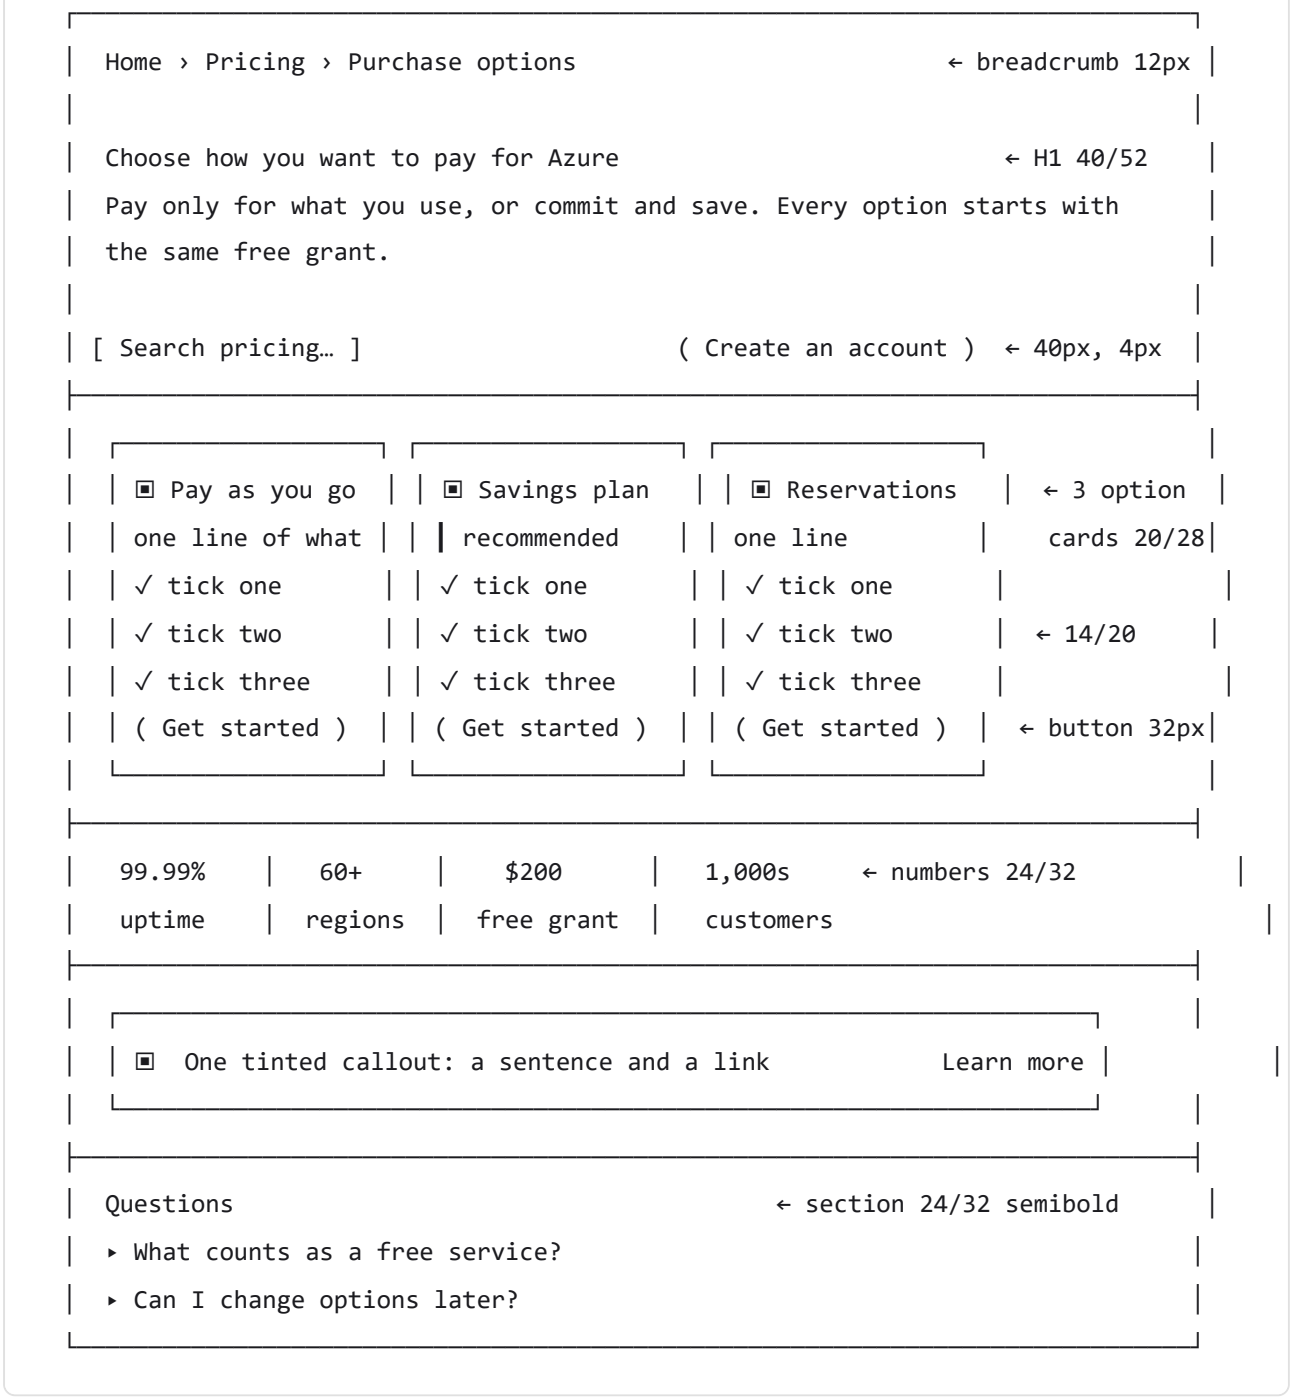

What makes it *that* page, in order of importance:

1. **The wash.** A soft brand tint behind the title, fading into the page — not a saturated band, not a photo.
2. **Three cards in a row, the same height, each ending in a button.** The middle one is marked, not coloured in.
3. **Ticks, not paragraphs.** Three short lines per card.
4. **Numbers in a row** under the cards.

5. **One tinted callout** in the whole page.
6. **Questions at the bottom**, in rows, not in a dialog.

---

2. The tokens — Microsoft's own numbers

Taken from the Fluent 2 design-system stylesheet (`--fontSizeHero800` , `--colorNeutralBackground1` , …), so the page is the system rather than an imitation of it.

Type

role	token	size / line	weight
page title (H1)	Hero900	**40 / 52**	600
panel & section title (H2)	Base600	**24 / 32**	600
card title (H3)	Base500	**20 / 28**	600
intro paragraph	Base400	**16 / 22**	400
body & card copy	Base300	**14 / 20**	400
caption, breadcrumb, label	Base200	**12 / 16**	400
code	—	**12.5 / 20**	400 mono

Font family: the workbench font in the app (as now), with **Segoe UI** named first in the fallback chain.

Space, radius, elevation

	values
spacing	2 · 4 · 6 · 8 · 10 · 12 · 16 · 20 · 24 · 32 · 40 · 48
radius	2 · 4 (controls) · 8 (cards) · 12 (the one big panel) · pill
shadow	`2` : `0 0 2px rgba(0,0,0,.12), 0 1px 2px rgba(0,0,0,.14)` · `4` · `8` · `16` — the reference uses **4** on a resting card and **8** on hover

Colour — light

role	value	used for
brand	`#0f6cbd`	the primary button, links, the recommended card's stroke
brand hover / pressed	`#115ea3` / `#0c3b5e`	states
brand tint	`#ebf3fc`	the wash behind the title, the callout, the recommended card's fill
text 1 / 2 / 3	`#242424` / `#616161` / `#707070`	headings / body / captions
surface page / card / subtle	`#fafafa` / `#ffffff` / `#f5f5f5`	page / cards / inset bars
stroke	`#d1d1d1`	hairlines; `#616161` when it must be seen
success / warning / danger	`#0e700e` / `#bc4b09` / `#d13438`	state only, never decoration

Colour — dark (Windows dark)


role	value
brand / hover / tint	`#115ea3` / `#479ef5` / `#082338`
text 1 / 2 / 3	`#ffffff` / `#d6d6d6` / `#adadad`
surface page / card / subtle	`#1f1f1f` / `#292929` / `#333333`
stroke	`#666666`

What the theme owns, and what Azure owns

	owner	why
page background, card background, strokes, text	**the VS Code theme** (`--vscode-*`), with the Fluent value as the fallback	a person's editor theme must not be argued with
the brand blue, its tint, the type ramp, spacing, radius, shadows, the wash	**Fluent 2 / Azure**, fixed	this is the identity; it is the same in both themes
the wash	brand tint → transparent, 160px tall, behind the title only	it is the one thing that makes the top of the page read as Azure

3. Welcome, drawn (light, in the app's window)

TEXT

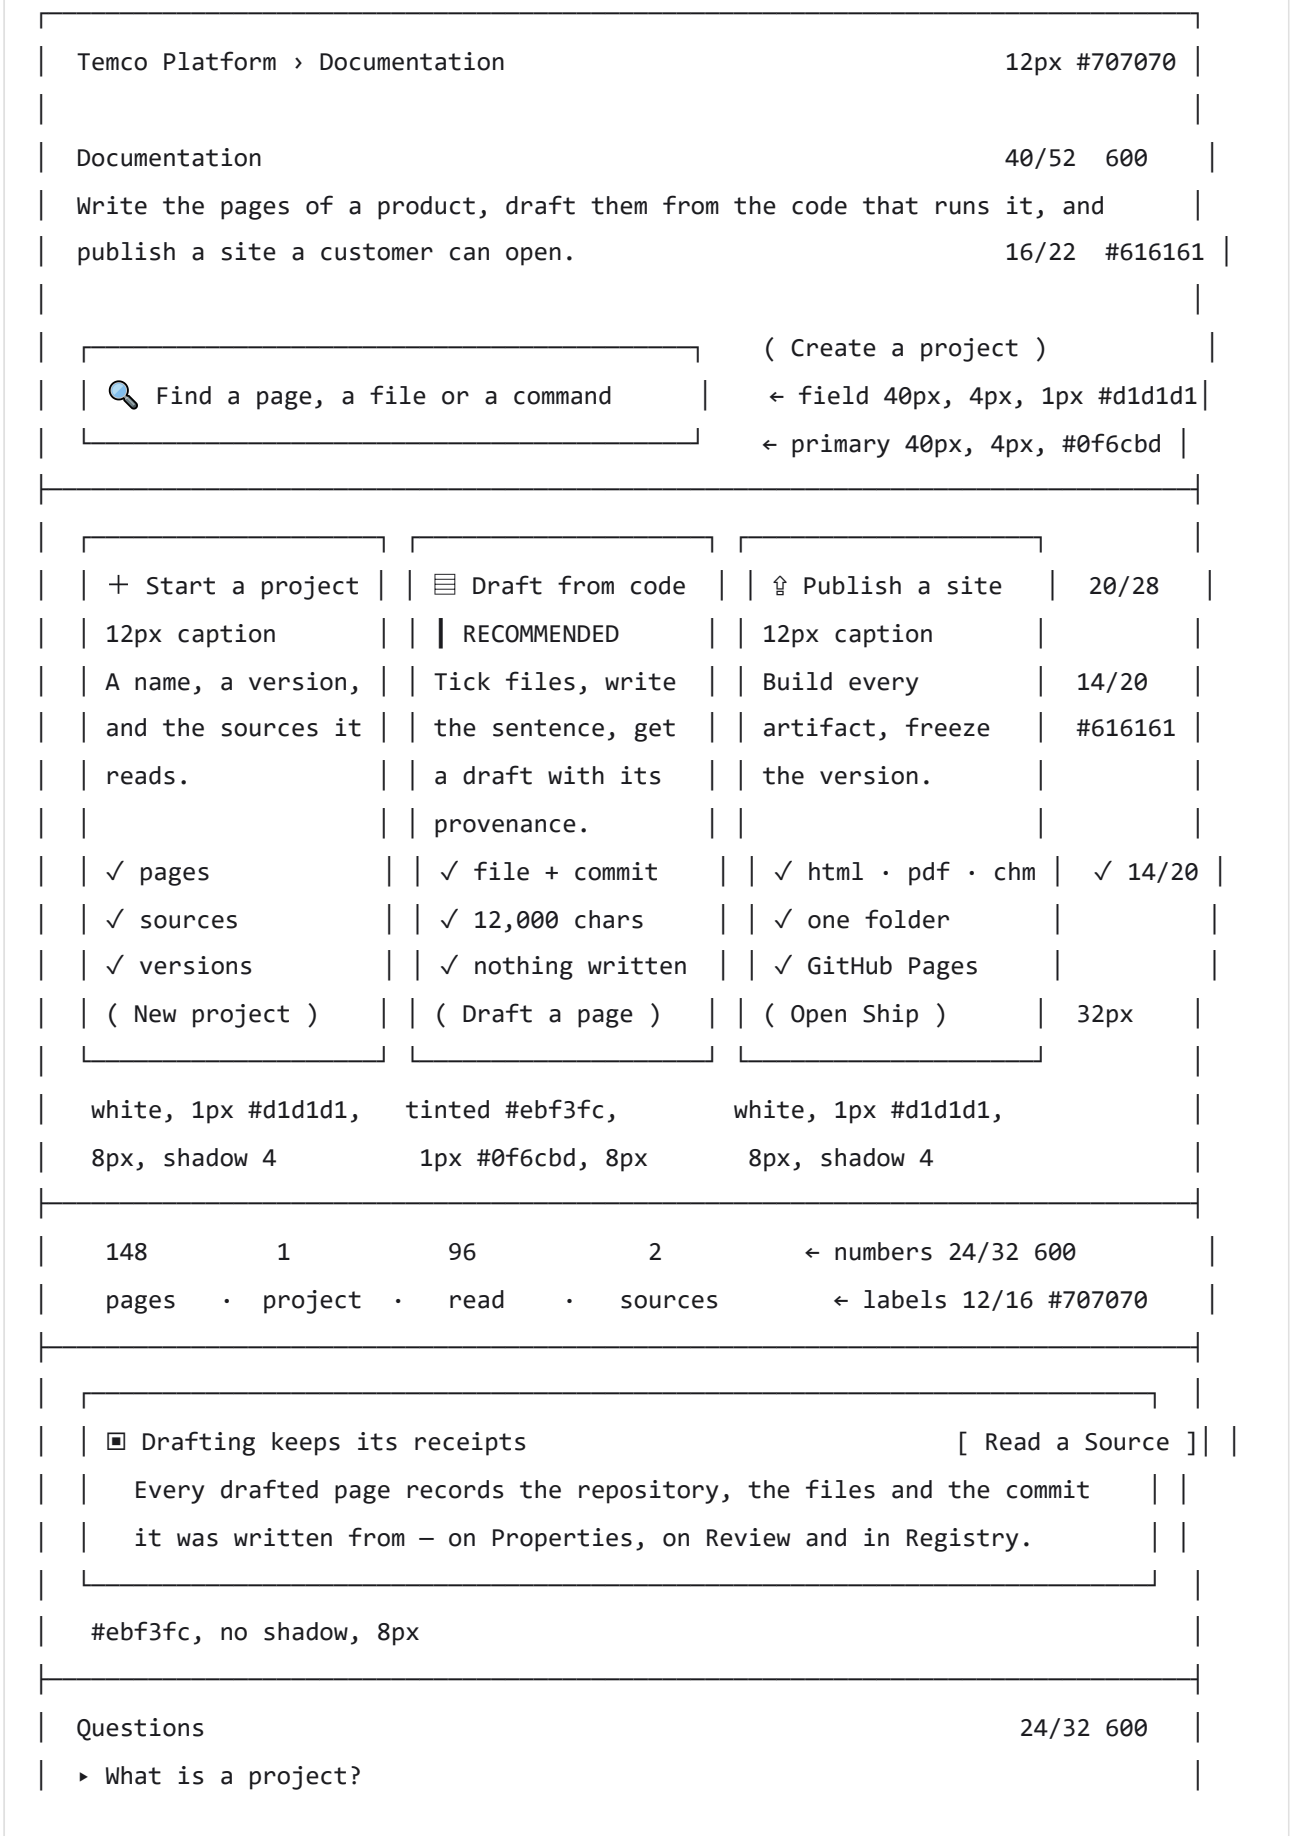

```
│  ▸ Where do the pages live?                                                  │
│  ▸ What happens when I publish?                                              │
│  ▸ Which languages can a page be translated into?                            │
└──────────────────────────────────────────────────────────────────────────────┘

                                                        ( ✦ Ask AI )  ← pill, bottom right
```

Notes on the drawing:

- **The wash** sits behind the title band only, 160px tall, `#ebf3fc → transparent`, and it is the *only* decoration on the page.
- **The three cards are the page.** They are the Azure purchase-option cards with our three acts.
- The **middle card is recommended** — filled with the tint and stroked with brand, because drafting from code is the thing this product does that others do not.
- **No panel with a code sample** on the front page: the code moved to where it belongs (the Drafting page, `§4.8a`), and the front page stopped competing with it. This is the change I most want confirmed.

---

4. Dark theme — the same page

TEXT


```
┌──────────────────────────────────────────────────────────────────────────────┐
│  Temco Platform › Documentation                                 12px #adadad │
│  Documentation                                                  40/52  #fff  │
│  Write the pages of a product…                                  16/22  #d6d6d6│
│  ┌──────────────────────────────────────────┐    ( Create a project )          │
│  └──────────────────────────────────────────┘    ← #115ea3, white text        │
├──────────────────────────────────────────────────────────────────────────────┤
│  ┌──────────────────────┐ ┌──────────────────────┐ ┌──────────────────────┐    │
│  │ #292929  1px #666    │ │ #082338  1px #479ef5 │ │ #292929  1px #666    │    │
│  └──────────────────────┘ └──────────────────────┘ └──────────────────────┘    │
└──────────────────────────────────────────────────────────────────────────────┘

   the wash is #082338 → transparent: the same shape, eleven shades darker
```

---

5. The option card, up close

TEXT

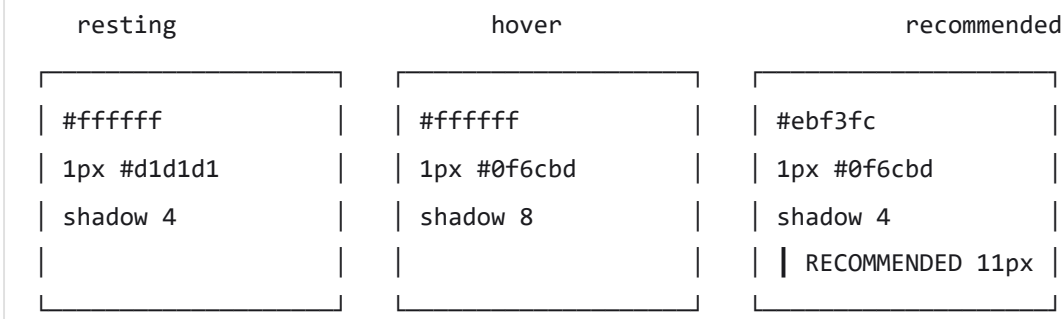

- The whole card is not a button: the **button inside it** is the action (rule 2 from the shell document).
- Hover moves the stroke and the shadow, never the layout.
- A tick is a 16px check glyph in `#0f6cbd` and a 14/20 line — the same construction as the Azure page.

---

6. The other pages inherit the same language

page	title	what sits under it
Projects	32/40	the same three-band rhythm: figures strip → list → tinted callout when there is nothing yet
Overview	32/40	figures strip → pipeline → feeds → cards
Documents	32/40	figures strip → areas + pages table
Ship (later)	32/40	four tabs, then the same card grid


One rule keeps them from drifting: **a page has at most one tinted callout, and its title is one size (32/40) unless it is the front page (40/52).**

---

7. Translation, in the design

Because the translator exists, the design has to say where it appears — background and content both:

TEXT

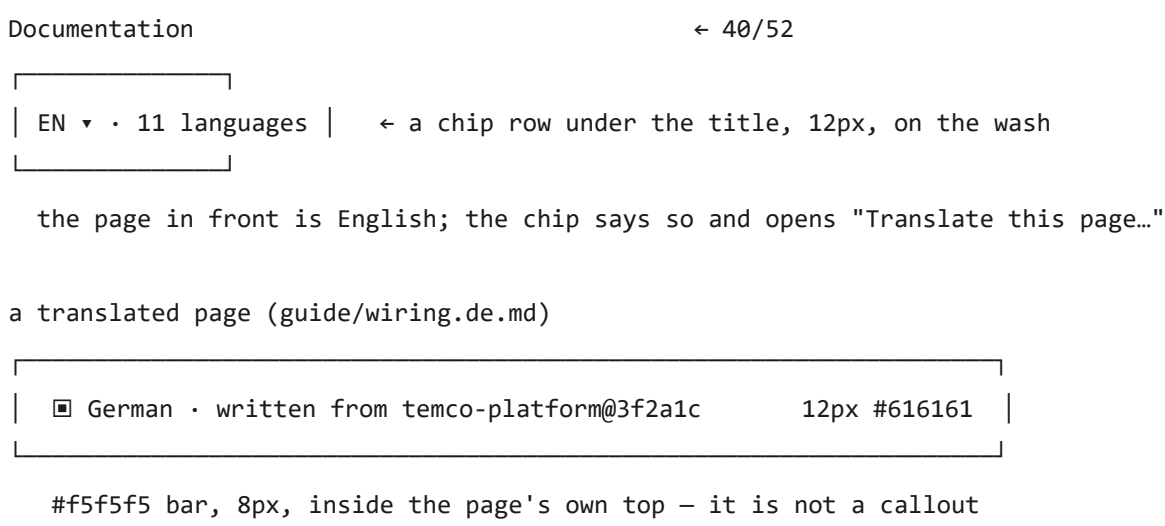

Translate is a **chip and one bar**, never a banner: a banner would make every page look like it is asking a question.

---

8. The content (the actual words)

where	words
breadcrumb	`Temco Platform › Documentation`
H1	**Documentation**
intro	Write the pages of a product, draft them from the code that runs it, and publish a site a customer can open.
field	`Find a page, a file or a command` · `Ctrl P`
primary	**Create a project**
card 1	**Start a project** — A name, a version, and the sources it reads. · ticks: pages, sources, versions · `New project`
card 2	**Draft from code** — Tick the files, write one sentence, and the draft arrives with its provenance. · ticks: file + commit, 12,000 characters, nothing written until accepted · `Draft a page`
card 3	**Publish a site** — Build every artifact, then freeze the version for readers. · ticks: html · pdf · chm, one folder, GitHub Pages · `Open Ship`
numbers	148 pages · 1 project · 96 read · 2 sources
callout	**Drafting keeps its receipts** — Every drafted page records the repository, the files and the commit it was written from. · `Read a Source`
questions	What is a project? · Where do the pages live? · What happens when I publish? · Which languages can a page be translated into?
floating	`Ask AI`

9. What changes in code, when this is agreed

#	file	change
1	`extensions/temco-ui/media/page.css`	the layer is rewritten to these tokens: Hero900/Base600/Base500/Base400/Base300, spacing 2–48, radius 2/4/8/12, shadow 4/8, brand `#0f6cbd` + tint `#ebf3fc`, and **one** sanctioned wash
2	`extensions/temco-ui/src/components.ts`	`hero()` gains the wash + breadcrumb; `optionCards()` replaces `cards()` on the front page; `callout()` replaces `banner()`; `questions()`; `chipRow()`; `numbers()`
3	`extensions/temco-workbench/src/helpPages.ts`	Welcome rebuilt to §3 and §8
4	`extensions/temco-docs/src/docsPages.ts`, `dashboard.ts`	title 32/40, figures strip, one callout where it earns it
5	`check-components.mts`	the gradient ban becomes "exactly one sanctioned wash, on `.az-wash`, brand tint → transparent"; the rest of the checks stay
6	`docs/temco-platform/ui/shell-v2.md` §10	replaced by this document once approved

Risk: low — it is CSS plus one page's markup. Everything else on the page (`kpi`, `section`, feeds, tables) keeps its current markup and only changes clothes.

---

10. What I need confirmed

#	decision	my recommendation	the alternative
1	**The three option cards** on the front page	yes — it is the Azure page's whole idea	keep the panel-with-code from v2
2	**Title size**	40/52 on the front page, 32/40 elsewhere	32/40 everywhere
3	**The wash** behind the title	yes, 160px, `#ebf3fc → transparent`	no wash, flat page
4	**Recommended card**	the middle one, tinted	none recommended
5	**Questions** at the bottom	yes, four rows	omit
6	**Floating Ask AI**	yes	omit

Say which of the six to change; everything else is as drawn. Then I implement it in one pass and show the render.